

# NPort® 6250 Series

## 2-port RS-232/422/485 secure terminal servers



- Simple solution for connecting serial devices to a network
- Secure operation modes for Real COM, TCP Server, TCP Client, Pair Connection, Terminal, and Reverse Terminal
- Non-standard baudrates supported with high precision
- Choice of network medium: 10/100BaseT(X) or 100BaseFX
- Enhanced remote configuration with HTTPS and SSH
- Port buffers for storing serial data when the Ethernet is off-line
- Supports IPv6



### : Overview

The 2-port NPort® 6250 device servers use the SSL and SSH protocols to transmit encrypted serial data over Ethernet. Models are available for connecting to a 10/100BaseT(X) copper Ethernet or

100BaseT(X) fiber network. Both single-mode and multi-mode fiber are supported.

### : Zero Data Loss if Ethernet Connection Fails

The NPort® 6250 device servers help guarantee reliability by providing users with secure serial-to-Ethernet data transmission and a customer-oriented hardware design. If the Ethernet connection fails, the NPort® 6250 will queue all serial data in its internal 64 KB port buffer. When

the Ethernet connection is re-established, the NPort® 6250 will immediately release all of the data in the buffer in the order that it was received. Users can increase the port buffer size by installing an SD card.

### : Specifications

#### Ethernet Interface

**Number of Ports:** 1  
**Speed:** 10/100 Mbps, auto MDI/MDIX  
**Connector:** 8-pin RJ45  
**Magnetic Isolation:** 1.5 KV built-in

#### Serial Interface

**Number of Ports:** 2  
**Serial Standards:** RS-232/422/485  
**Connector:** DB9 male  
**RS-485 Data Direction Control:** ADDC® (Automatic Data Direction Control)  
**Serial Line Protection:** 15 KV ESD protection for all signals  
**Console Port:** Serial port 1 doubles as RS-232 console port

#### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8  
**Stop Bits:** 1, 1.5, 2  
**Parity:** None, Even, Odd, Space, Mark  
**Flow Control:** RTS/CTS, DTR/DSR, XON/XOFF  
**Baudrate:** 50 bps to 921.6 Kbps (supports non-standard baudrates)  
**Pull High/Low Resistor for RS-485:** 1 KΩ, 150 KΩ

#### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND  
**RS-422:** Tx+, Tx-, Rx+, Rx-, GND  
**RS-485-4w:** Tx+, Tx-, Rx+, Rx-, GND  
**RS-485-2w:** Data+, Data-, GND

#### Memory Expansion Slot

**Slot Type:** SD socket (supports up to 2 GB)

#### Software

**Network Protocols:** ICMP, IP, TCP, UDP, DHCP, BOOTP, Telnet, DNS, SNMP V1/V2c/V3, HTTP, SMTP, ARP, PPPoE  
**Security Protocols:** DES, 3DES, AES, SSH, SSL  
**Configuration Options:** Web Console, Serial Console, Telnet Console, Windows Search Utility  
**Windows Real COM Drivers:** Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8 x86/x64, 2012 x64, Embedded CE 5.0/6.0, XP Embedded  
**Fixed TTY Drivers:** SCO Unix, SCO OpenServer, UnixWare 7, UnixWare 2.1, SVR 4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x  
**Linux Real TTY Drivers:** Linux kernel 2.4.x, 2.6.x, 3.x  
**Management:** SNMP MIB-II  
**IP Routing:** Static, RIP-I, RIP-II

#### Operation Modes

**Standard:** Real COM, TCP Server, TCP Client, UDP, Pair Connection, RFC2217, Terminal, Reverse Telnet, Ethernet Modem, Printer, PPP, Disabled  
**Secure:** Secure Real COM, Secure TCP Server, Secure TCP Client, Secure Pair Connection, SSH, Reverse SSH

#### Applications

**Terminal Sessions:** 8 sessions per port

#### Physical Characteristics

**Housing:** Metal  
**Weight:** 730 g  
**Dimensions:**  
 Without ears: 77 x 111 x 29 mm (3.30 x 4.37 x 1.1 in)  
 With ears: 89 x 111 x 29 mm (3.50 x 4.37 x 1.1 in)

### Environmental Limits

**Operating Temperature:** 0 to 55°C (32 to 131°F)  
**Storage Temperature:** -40 to 75°C (-40 to 167°F)  
**Ambient Relative Humidity:** 5 to 95% (non-condensing)  
**Altitude:** Up to 2000 m  
**Note:** Please contact Moxa if you require products guaranteed to function properly at higher altitudes.

### Power Requirements

**Input Voltage:** 12 to 48 VDC  
**Power Consumption:**  
 NPort 6250: 333 mA @ 12 V, 173 mA @ 24 V  
 NPort 6250-M-SC: 428 mA @ 12 V, 219 mA @ 24 V  
 NPort 6250-S-SC: 376 mA @ 12 V, 193 mA @ 24 V  
**Alarm Contact:** Relay output with current carrying capacity of 1 A @ 24 VDC  
**Power Line Protection:** 1 KV burst (EN 61000-4-4: EFT/B), 0.5 KV surge (EN 61000-4-5)


### Standards and Certifications

**Safety:** UL 60950-1, EN 60950-1  
**EMC:** CE, FCC  
**EMI:** EN 55022 Class A, FCC Part 15 Subpart B Class A  
**EMS:**  
 EN 55024,  
 EN 61000-4-2 (ESD) Level 2/3,  
 EN 61000-4-3 (RS) Level 2,  
 EN 61000-4-4 (EFT) Level 2,  
 EN 61000-4-5 (Surge) Level 2,  
 EN 61000-4-6 (CS) Level 2,  
 EN 61000-4-8 Level 1,

EN 61000-4-11  
**Freefall:** IEC-68-2-6, IEC-68-2-34, IEC-68-2-32  
**Vibration:** IEC-68-2-6, IEC-68-2-34  
**Green Product:** RoHS, CRoHS, WEEE  
**Reliability**  
**Alert Tools:** Built-in buzzer and RTC (real-time clock)  
**Automatic Reboot Trigger:** Built-in WDT (watchdog timer)  
**MTBF (mean time between failures):**  
 NPort 6250: 226,128 hrs  
 NPort 6250-M-SC: 225,762 hrs  
 NPort 6250-S-SC: 225,762 hrs  
**Warranty**  
**Warranty Period:** 5 years  
**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)


### Dimensions

Unit: mm (inch)

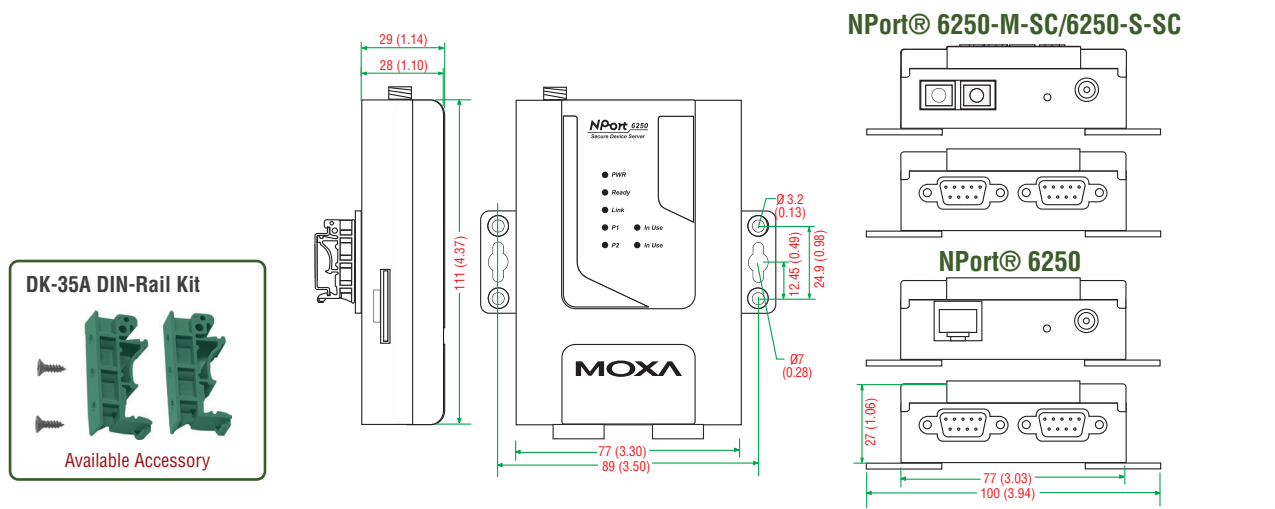

### Pin Assignment

PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-

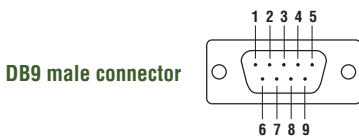

DB9 male connector

### Ordering Information

#### Available Models

**NPort 6250:** 2-port secure device server, RS-232/422/485 to Ethernet

**NPort 6250-M-SC:** 2-port secure device server, RS-232/422/485 to multi-mode fiber (SC connector)

**NPort 6250-S-SC:** 2-port secure device server, RS-232/422/485 to single-mode fiber (SC connector)

#### Optional Accessories (can be purchased separately)

**DK-35A:** Mounting Kit for 35-mm DIN-Rail

**NP21101:** DB25 male to DB9 female RS-232 cable, 30 cm

#### Package Checklist

- 1 NPort 6250 device server
- Power Adaptor
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card