


MiiNePort E3 Series

10/100 Mbps embedded serial device servers



- > IEEE 802.3af compliant PoE pass-through
- > Use Moxa's high quality and reliable second generation MiiNe SoC
- > Versatile choice of operation modes fulfill specific application requirements
- > Green design with extremely low power consumption
- > MiiNePort NetEZ Technology makes integration incredibly easy
- > Highly compact embedded device module

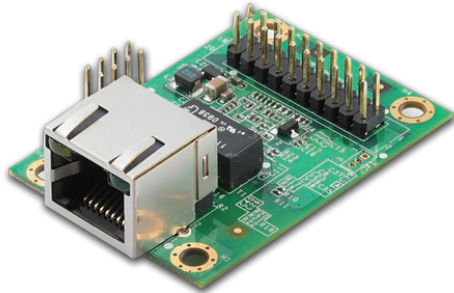

Overview

Moxa's MiiNePort E3 series embedded device servers are designed for manufacturers who want to add sophisticated network connectivity to their serial devices with minimal integration effort. The MiiNePort E3 is empowered by the MiiNe, Moxa's second generation SoC, which supports 10/100 Mbps Ethernet, up to 921.6 Kbps serial baudrate, a versatile selection of ready-to-use operation modes, and requires

only a small amount of power. By using Moxa's innovative NetEZ technology, the MiiNePort E3 can be used to convert any device with a standard serial interface to an Ethernet enabled device in no time. In addition, the MiiNePort E3 is a compact embedded device server with an RJ45 connector, making it easy to fit into virtually any existing serial device.


The MiiNe—Moxa's 2nd Generation SoC

MiiNe

The MiiNe was created to provide manufacturers with a competitive embedded serial-to-Ethernet solution.

The MiiNePort E3, which uses the MiiNe for its SoC, is a compact embedded device server that has the lowest power consumption of similar products. The MiiNe has the following features:

- Designed for serial-to-Ethernet applications
- Uses an ARM core
- Uses Moxa's own advanced UART technology
- 2 MB Flash and 4 MB SDRAM memory built in

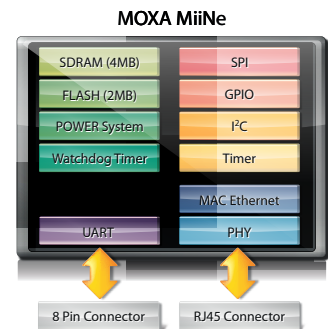

Specifications

Form Factor

Type: Pin header module
Dimensions: 35 x 52.5 x 18 mm (1.38 x 2.07 x 0.71 in)
Weight: 12 g

System Information

CPU: 32-bit ARM Core
RAM: 4 MB built in
Flash: 2 MB built in

Ethernet Interface

Number of Ports: 1
Speed: 10/100 Mbps, auto MDI/MDIX
Magnetic Isolation Protection: 1.5 KV built-in
Connector: RJ45 (magnetic)
LEDs: 10BASE-T & 100BASE-TX Link Activity
PoE Pass-through: 802.3af compliant

Serial Interface


Number of Ports: 1
Transmission Format: Standard TTL
Serial Communication Parameters
Data Bits: 5, 6, 7, 8
Stop Bits: 1, 1.5, 2
Parity: None, Even, Odd, Space, Mark
Flow Control: RTS/CTS, DTR/DSR, XON/XOFF
Baudrate: (non-standard baudrates supported)
 MiiNePort E3: 50 bps to 230.4 Kbps
 MiiNePort E3-H: 50 bps to 921.6 Kbps

Serial Signals

TTL: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RST (reset circuit), GND

Pin Assignment

| Ethernet Pins (JP2) | | | Serial Pins and Power Pins (JP4) | | | | | |
|---------------------|-------------------|------------------------------|----------------------------------|-------------|----------------------|-----|-------------|--------------------------|
| Pin | Signal Name | Function | Pin | Signal Name | Function | Pin | Signal Name | Function |
| 1 | Reserve | N/A | 1 | Serial Rx | Receive Serial Data | 11 | DTR | Data Terminal Ready |
| 2 | Reserve | N/A | 2 | Ready LED | System To Ready LED | 12 | Reserve | N/A |
| 3 | Reserve | N/A | 3 | Serial Tx | Transmit Serial Data | 13 | LDSR | Data Set Ready |
| 4 | Reserve | N/A | 4 | GPIO | Programmable I/O | 14 | Reserve | N/A |
| 5 | PoE signal pair 1 | PoE Power from Tx signal | 5 | LDCD | Data Carrier Detect | 15 | LCTS | Clear To Send |
| 6 | PoE spare pair 1 | PoE Power from RJ45 4, 5 pin | 6 | GPIO | Programmable I/O | 16 | SW_Reset | Reset to factory default |
| 7 | PoE signal pair 2 | PoE Power from Rx signal | 7 | RS485_EN0 | RS-485 Enable | 17 | Reserve | N/A |
| 8 | PoE spare pair 2 | PoE Power from RJ45 7, 8 pin | 8 | GPIO | Programmable I/O | 18 | Reserve | N/A |
| | | | 9 | LRTS | Request To Send | 19 | GND | Circuit Ground |
| | | | 10 | GPIO | Programmable I/O | 20 | VCC | Power Supply |



: Ordering Information

Available Modules

MiiNePort E3: Embedded device server for TTL devices, pin header module, 10/100M with RJ45 connector, 50 bps to 230.4 Kbps baudrate, 0 to 55°C operating temperature

MiiNePort E3-H: Embedded device server for TTL devices, pin header module, 10/100M with RJ45 connector, 50 bps to 921.6 Kbps baudrate, 0 to 55°C operating temperature

MiiNePort E3-T: Embedded device server for TTL devices, pin header module, 10/100M with RJ45 connector, 50 bps to 230.4 Kbps baudrate, -40 to 85°C operating temperature

MiiNePort E3-H-T: Embedded device server for TTL devices, pin header module, 10/100M with RJ45 connector, 50 bps to 921.6 Kbps baudrate, -40 to 85°C operating temperature

Available Starter Kits

MiiNePort E3-ST: Starter kit for the MiiNePort E3 Series, module included

MiiNePort E3-H-ST: Starter kit for the MiiNePort E3-H Series, module included

Package Checklist (modules)

- MiiNePort E3 module

Package Checklist (starter kits)

- MiiNePort E3 module
- MiiNePort E3 evaluation board
- Universal power adaptor
- 2 power cords
- Null modem cable
- Cross-over Ethernet cable
- 2 flat cables
- 1 pack screw and spacer
- Document and software CD
- Quick installation guide (printed)
- Warranty card