
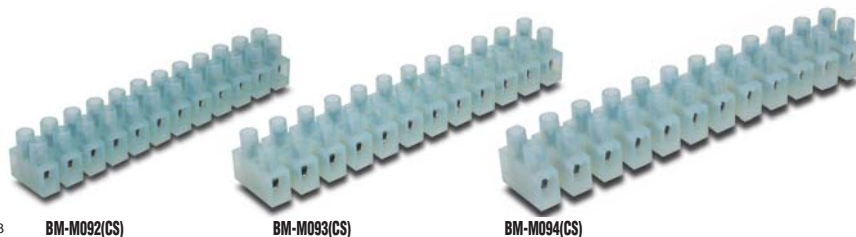



Direct Mount Terminal Blocks

Direct mount terminal blocks do not require the use of a DIN rail to mount. By utilizing two mounting screws, they can be mounted to any backplane. They are supplied with or without wire protectors and can easily be cut to length with ordinary hand tools.


BM-M092CS

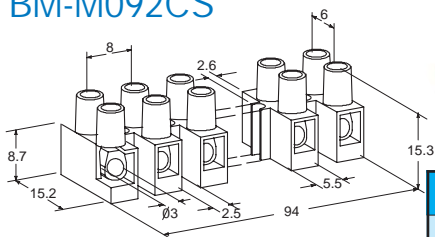

BM-M093CS

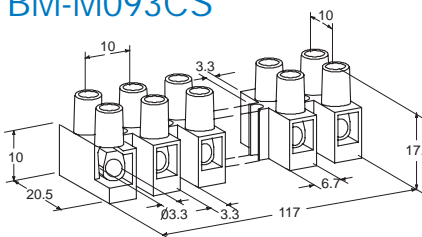


BM-M094CS

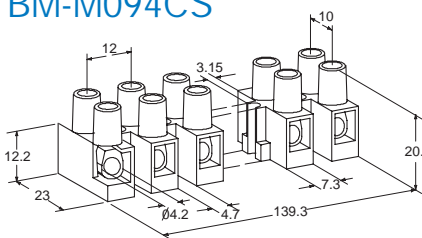

Measurements in mm.

Specifications									
	Part#	Pcs/ Pkg	Price/ Pkg	Part#	Pcs/ Pkg	Price/ Pkg	Part#	Pcs/ Pkg	Price/ Pkg
12 Pole, Without Wire Protector	BM-M092	50	<--->	BM-M093	50	<--->	BM-M094	50	<--->
12 Pole, With Wire Protector	BM-M092CS	50	<--->	BM-M093CS	50	<--->	BM-M094CS	50	<--->
UL Approval, Field Wiring	600V/ 250V**	10A	20-16 AWG	600V/ 250V**	20A	18-12 AWG	600V/ 250V**	30A	18-10 AWG
UL Approval, Factory Wiring	600V/ 250V**	15A	20-16 AWG	600V/ 250V**	30A	18-12 AWG	600V/ 250V**	40A	18-10 AWG
CSA Approval	150V/ 300V**	20A	18-16 AWG	150V/ 300V**	30A	18-14 AWG	150V/ 300V**	30A	18-10 AWG
CE Conformity	CE 93/68/EEC								
Agency File #	UL E70156, CSA LR 44081-9			UL E70156, CSA LR 44081-11			UL E70156, CSA LR 44081-12		
Wire Strip Length	0.39" (10mm)			0.39" (10mm)			0.39" (10mm)		
Tightening Torque	4.4 lb-in(0.5Nm)			7 lb-in			7 lb-in		
* UL Temperature Rating: 105° **Commercial Use									

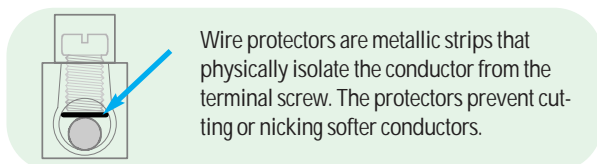

Wire protectors are metallic strips that physically isolate the conductor from the terminal screw. The protectors prevent cutting or nicking softer conductors.

PLC Overview

DL05/06 PLC

DL105 PLC

DL205 PLC

DL305 PLC

DL405 PLC

Field I/O

Software

C-more HMIs

Other HMI

AC Drives

Motors

Steppers/ Servos

Motor Controls

Proximity Sensors

Photo Sensors

Limit Switches

Encoders

Pushbuttons/ Lights

Process

Relays/ Timers

Comm.

TB's & Wiring

Power

Enclosures

Appendix

Part Index